

Penny + Giles announces the release of a new single axis joystick controller design that enables use in heavy duty applications without compromising on smooth proportional control. The **JC1500** joystick utilises contactless rotary position sensor technology combined with a rugged, low profile design.

The joystick provides reliable and accurate output signals - and includes a second output to enable error checking of the system integrity. The **JC1500** is intended for use in the off-highway specialist vehicles market - particularly where reliability and strength are paramount e.g. Aerial Work Platforms.

The **JC1500** joystick complements the existing range of JC150 potentiometer track joysticks and has the same panel mounting details – allowing replacement or upgrade with no panel modifications. The new joystick is designed to share the same range of handles and grips used in the JC150 and JC6000 models.



Key Features

- Contactless – Hall effect technology
- Single axis control with spring to center or friction hold lever action
- Lock and detent features
- Choice of handles and grips
- 5Vdc or 9-30Vdc supply
- Dual channel output with optional ramp directions
- Analog (Vdc) or Digital (PWM) outputs
- Extremely low signal noise – less than 1mV_{rms}
- Operating temperature -40 to +85°C
- Environmental protection to IP69K above the panel
- 53mm under-panel depth
- Electrically interchangeable with potentiometers

JC1500 SINGLE AXIS CONTACTLESS JOYSTICK

www.pennyandgiles.com

Penny & Giles Controls Ltd
15 Airfield Road
Christchurch
Dorset BH23 3TG
United Kingdom
+44 (0) 1202 409409
+44 (0) 1202 409475 Fax
sales@pennyandgiles.com


Penny & Giles USA
665 North Baldwin Park Boulevard
City of Industry
CA 91746
USA
+1 626 480 2150
+1 626 369 6318 Fax
us.sales@pennyandgiles.com

www.penny-giles.de


Penny & Giles GmbH
Straussenlettenstr. 7b
85053
Ingolstadt
Germany
+49 (0) 841 885567-0
+49 (0) 841 885567-67 Fax
info@penny-giles.de

1		2				3			4				5				6										
AXIS	OUTPUT	OUTPUT SENSE				OPERATION			SPRING			FEATURES				DETENT		HANDLE		ROCKER OUTPUT		ROCKER PROFILE		GAITER		INTERFACE	
Y	*	**				*			*			***				**		****		*		*		*		***	
	A P	PP PO PN NP OO	S	F	L M N	NL CL, CL1 EL, EL1	D0 D1	NH NHF HKN HB	E N Q R	S V	R S	STN STA															

ELECTRICAL DATA	
Insulation Resistance @50V DC; All sensor wires to main body	50 MΩ
Maximum Current consumption	12.5mA per Channel
Supply Voltage	5Vdc +/-0.5Vdc Regulated and 9V to 30Vdc Unregulated
Supply Current	≤25mA (12.5mA per Channel)
Supply reverse polarity protection	Yes
Short circuit protection output to GND	Yes
Short circuit protection output to supply	In 5V regulated mode only
Over voltage protection	up to 40V (-40 to +60°C)
Power on settlement	<1s
Resolution	12 Bit (0.025% of measurement range)
Non-linearity	<+/-0.4%
Temperature coefficient	<+/-30ppm/°C in 5V regulated supply mode <+/-90ppm/°C in 9-30V supply mode
OUTPUT (A or P)	
Options	Analogue or Digital PWM
ANALOGUE OUTPUT OPTION (A)	
Voltage output range (9-30V Supply)	Absolute voltage from 0.5V to 4.5V over measurement range (±150mV)
Voltage output range (5V Supply)	Ratiometric output voltage from 10% to 90% (±50mV) 10% to 90% over measurement range
Monotonic range	0.25V (5%) and 4.75 (95%) nominal
Load Resistance	10 Kohms minimum (resistive to ground)
Output noise	≤1mVrms
Input/Output delay	2.5ms
DIGITAL PWM OUTPUT OPTION (P)	
PWM frequency	244Hz +/-20% over temperature range
PWM levels (9-30V supply)	0V and 5V nominal (+/-3%)
PWM levels (5V supply)	0v and Vsupply (+/-1%)
Duty cycle	10% to 90% over measurement range
Monotonic range	5% and 95% nominal
Load Resistance	10 Kohms minimum (resistive to ground)
Rise/Fall time	<20 μs typical

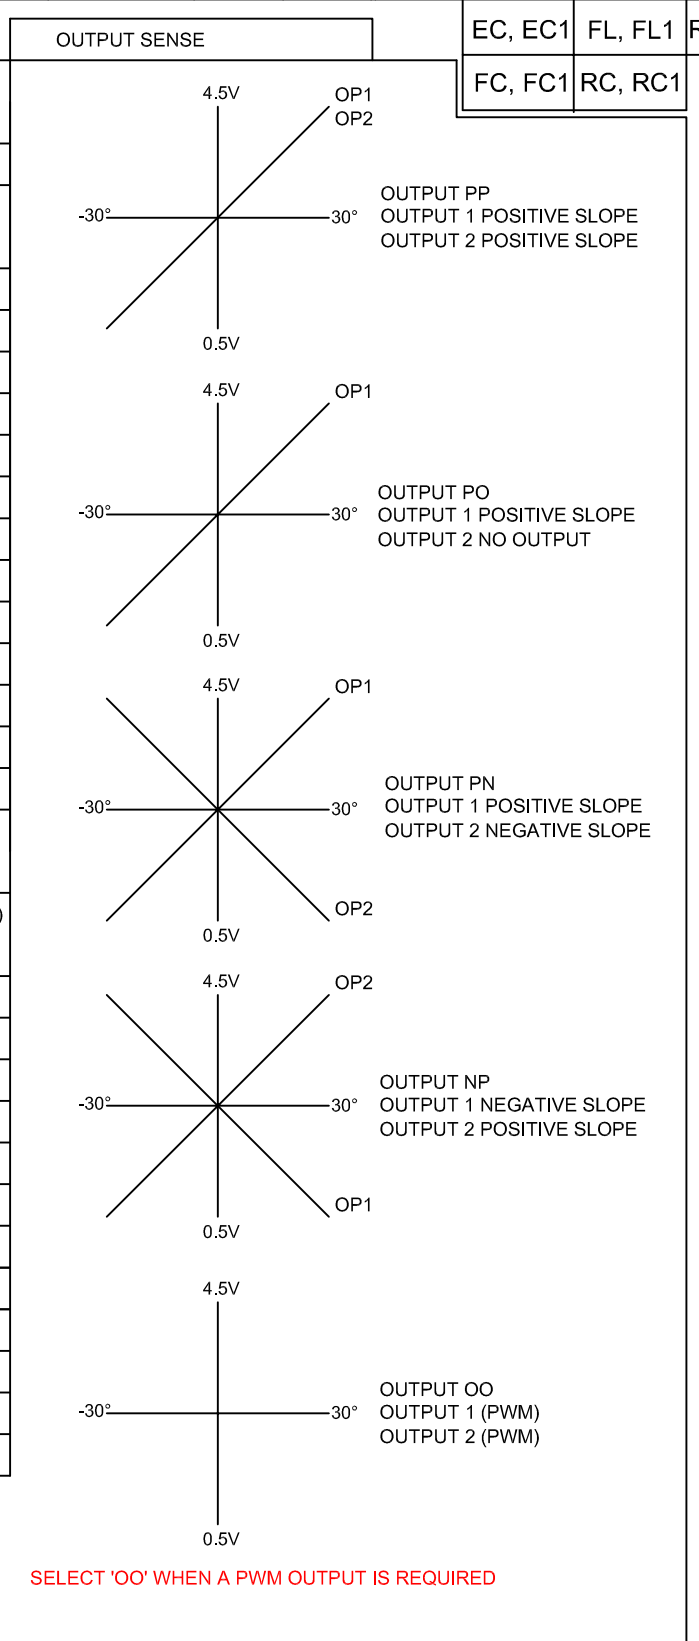

SELECT 'OO' WHEN A PWM OUTPUT IS REQUIRED

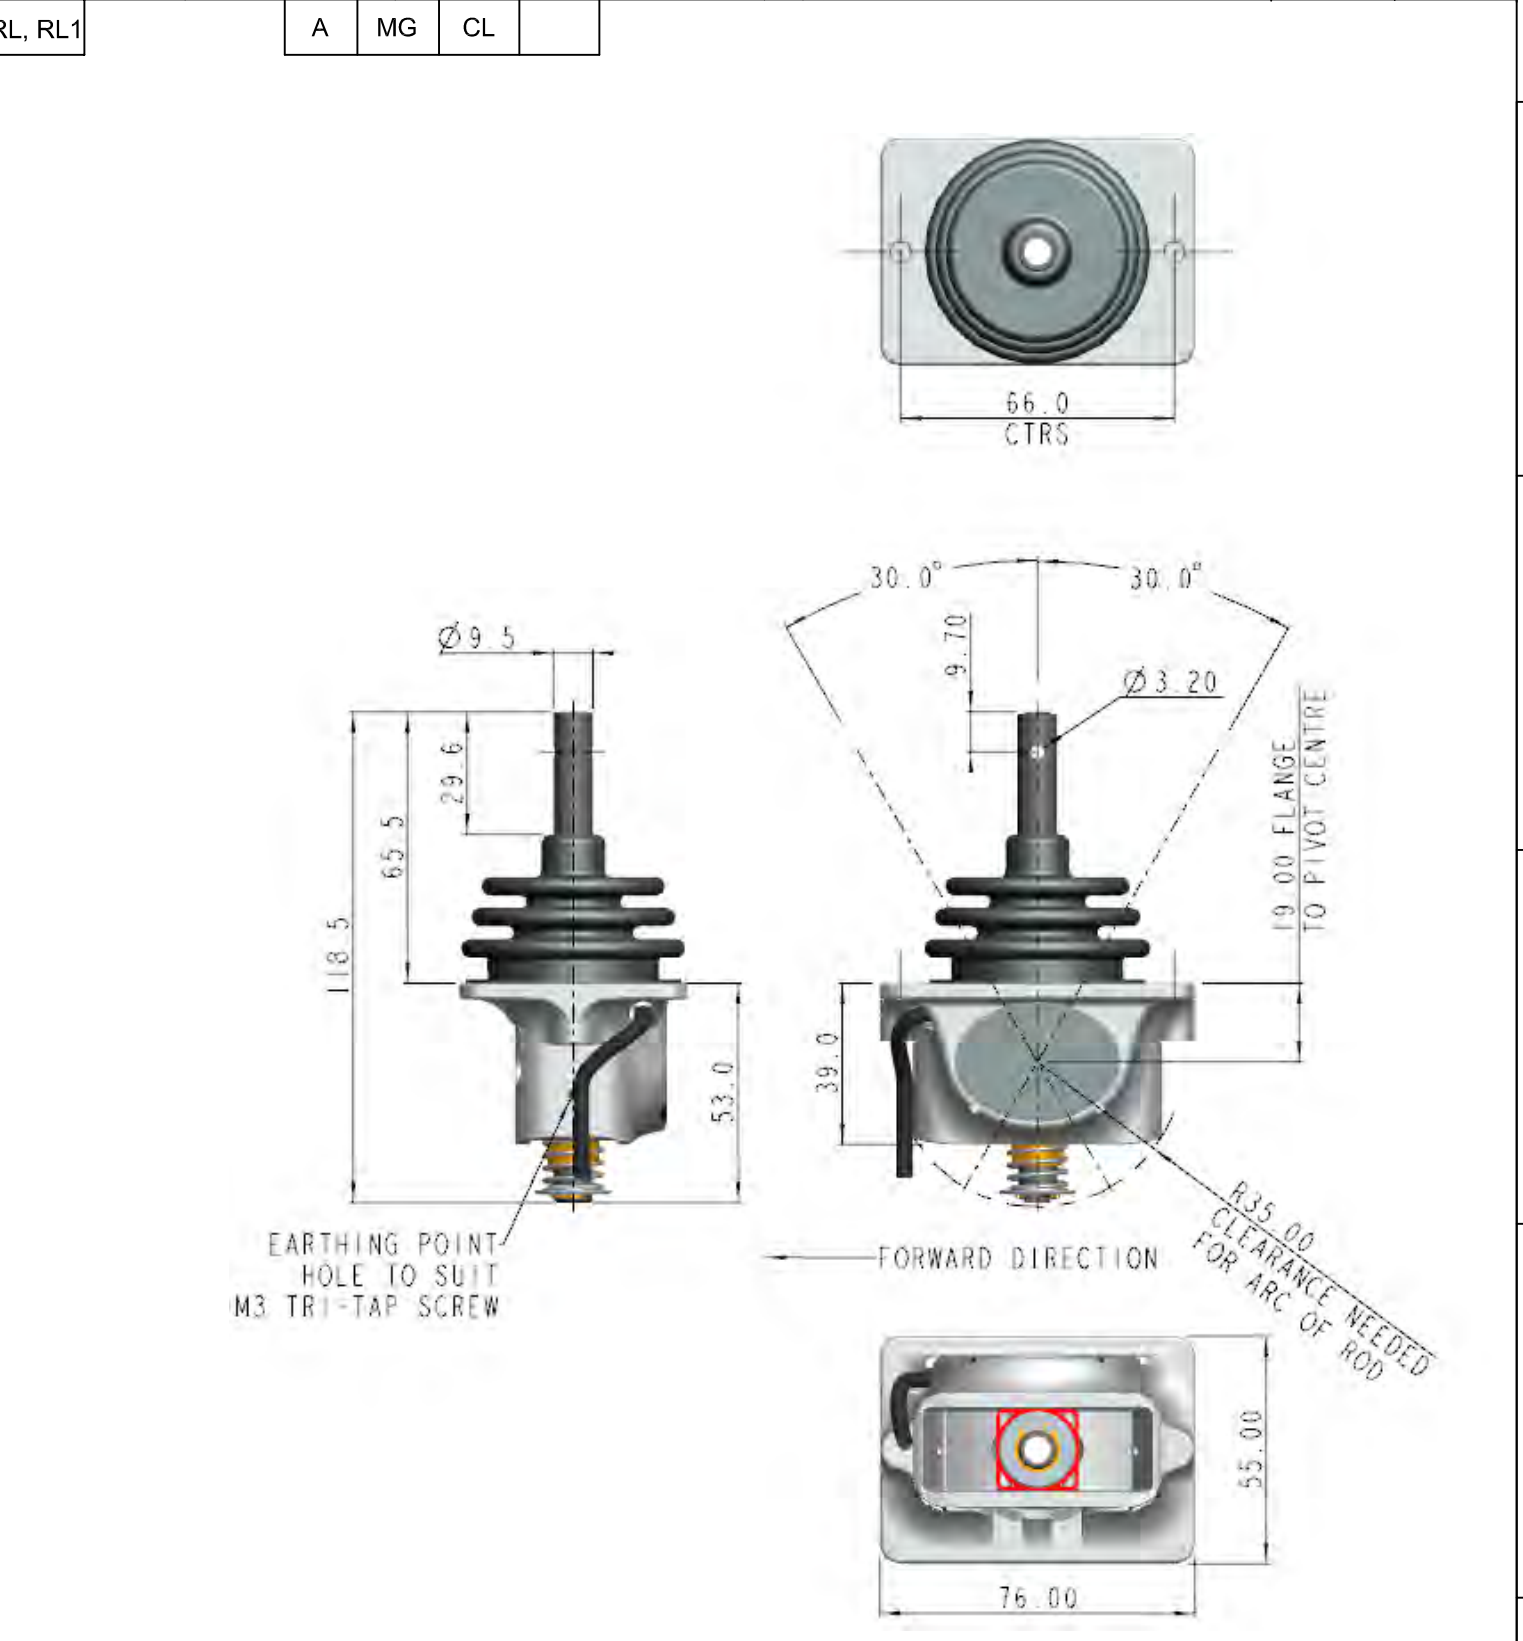


A3	Penny + Giles	METRIC	ALL SCREW THREADS TO BS 3643 PT. 2 EXTERNAL CLASS: 6g INTERNAL CLASS: 6H TOLERANCES IN LINE WITH PENNY & GILES STANDARDS 56-301	RoHS COMPLIANCE	TITLE	SPECIFICATION NUMBER
ACAD	© COPYRIGHT RESERVED.	NOT TO SCALE; DO NOT SCALE. IF IN DOUBT, ASK.		YES	SINGLE AXIS JOYSTICK	JC1500-GEN-****
SHT 1 OF 3 SHTS	THIS DOCUMENT CONTAINS CONFIDENTIAL AND/OR PROPRIETARY INFORMATION AND MAY NOT BE REPRODUCED IN ANY FORM WHATSOEVER, NOR MAY ITS CONTENTS BE DIVULGED TO THIRD PARTIES WITHOUT THE WRITTEN PERMISSION OF THE OWNER. ALL RIGHTS RESERVED.	THIRD ANGLE PROJECTION TO BS 8888	LINEAR (MACHINING) 0.0 mm +/- 0.5mm 0.0 mm +/- 0.2mm 0.0 mm +/- 0.1mm 0.00 mm +/- 0.01mm	NO	MH DA	
	CHANGES TO THIS BORDER MUST BE ACTIONED ON SK309927		ANGULAR +/-1° UNLESS OTHERWISE STATED	1	18/05/10	JD
				ISSUE	DATE	DRAWN
				ENG' APPROVAL	QUAL' APPROVAL	RTP
						CHANGES

1		2		3		4		5		6	
MECHANICAL DATA											
OPERATION (S or F)											
SPRING RETURN		S		FRICTION		F					
SPRING (L, M OR N)											
LIGHT		L		MEDIUM		M		NO SPRING		N	
Breakout force		0.75Nm		Breakout force		1.15Nm		Breakout force		1.50Nm	
Operating force		1.25Nm		Operating force		1.85Nm		Operating force		1.50Nm	
NO SPRING OPTION AVAILABLE ON FRICTION JOYSTICKS ONLY											
Maximum Overload on Axis				110Nm							
Maximum Overload off Axis				70Nm							
Maximum Downward Load				1000N							
Maximum Torque				35Nm							
Mechanical Life (Centre & End Lock, Friction)				10 Million (500,000, TBD)							
The loads required to deflect the joystick are measured 100mm from the joystick mounting surface perpendicular to the operating rod, throughout the operating angle. (With no handle fitted). The operating force will be affected by the handle length & type. One cycle is defined as operation from the centre to one extreme and back to centre. The mechanical life is based on a test frequency of 1 Hertz.											
FEATURES (NL, CL, EL, EC, FL, RL, FC, RC)											
NO LOCK		NL		Spring Return							
CENTRE LOCK		CL		Mechanical Lock at Centre							
END LOCK		EL		Mechanical Lock at both Ends							
END LOCK WITH CENTRE LOCK		EC		Mechanical Lock at centre and both Ends							
FORWARD END LOCK		FL		Mechanical Lock in forward direction							
REVERSE END LOCK		RL		Mechanical Lock in reverse direction							
CENTRE AND FORWARD END LOCK		FC		Mechanical Lock at centre and forward direction							
CENTRE AND REVERSE END LOCK		RC		Mechanical Lock at centre and reverse direction							
FOR LONGER OPERATING ROD VERSIONS OF THE ABOVE ADD 1 TO THE CODE											
EXAMPLE. CENTRE LOCK WITH LONGER OPERATING ROD = CL1											
End lock Joysticks are limited to +/-25° travel											
DETENTS (D00 or D01)											
NO DETENT		D00		Used for 0° to 60° travel option (end to end)							
CENTRE		D01		Mechanical Detent at Centre							
FRICTION HELD ONLY AVAILABLE WITH NO CENTRE DETENT											
HANDLE (NH, NHF, HKN, HB, AMF, MGMF, CL)		CODE		GAITER OPTION							
NO HANDLE FITTED		NH		R or S option							
NO HANDLE FITTED (wires through operating lever)		NHF		R or S option							
HKN HANDLE FITTED		HKN		R or S option							
HB HANDLE RANGE FITTED		HB*		R or S option							
Refer to HB handle specification for details											
AMF HANDLE RANGE FITTED		A****		R or S option							
Refer to AMF handle specification for details											
MGMF HANDLE RANGE FITTED		MG**		R or S option							
Refer to MGMF handle specification for details											
PULL COLLAR HANDLE FITTED		CL		R option							
CL HANDLE ONLY AVAILABLE WHEN LOCKS HAVE BEEN CHOSEN											

ROCKER OPTION (E, N, Q, R)		CODE	
0% - 100% OUTPUT		E	
0% - 100% OUTPUT		N	
25% - 75% OUTPUT		Q	
10% - 90% OUTPUT		R	
ROCKER PROFILE (S OR V)		CODE	
Standard Rocker Profile		S	
V - Rocker Profile		V	
ROCKERS ARE ONLY AVAILABLE ON AMF HANDLE OPTIONS			
REFER TO AMF HANDLE SPECIFICATION FOR DETAILS			

GAITER OPTION (R or S)		Round Gaiter		R		STN Interface dimensions below		Square Gaiter		S		STN Interface dimensions below			
S OPTION (Square Gaiter) NOT AVAILABLE WITH CENTRE AND END LOCKS															
2 Holes to suit M5								2 Holes to suit M5							
Mounting Screws		M5 x 12mm Tri-Tap Countersunk Head (Supplied)													
Mounting Torque		3.5Nm Maximum													
Panel Thickness		3.0mm to 6mm													
Round Gaiter (R). The joystick is designed to be fitted from below the mounting panel, through a 42 - 44mm diameter hole.															
Square Gaiter (S). The joystick is designed to be fitted from below the mounting panel, through a 48 by 54.5mm elliptical hole.															
It is the responsibility of the customer to ensure that the joystick mounting screws are torqued correctly and that the mounting panel is of a sufficient design to ensure a seal is formed on joystick installation.															

A3		Penny + Giles		METRIC		ALL SCREW THREADS TO BS 3643 PT. 2		RoHS COMPLIANCE		TITLE		SPECIFICATION NUMBER	
ACAD		© COPYRIGHT RESERVED.		NOT TO SCALE: DO NOT SCALE. IF IN DOUBT, ASK.		EXTERNAL CLASS: 6g INTERNAL CLASS: 6H		YES		SINGLE AXIS JOYSTICK		JC1500-GEN-****	
SHT 2 OF 3 SHTS		THIS DOCUMENT CONTAINS CONFIDENTIAL AND/OR PROPRIETARY INFORMATION AND MAY NOT BE REPRODUCED IN ANY FORM WHATSOEVER, NOR MAY ITS CONTENTS BE DIVULGED TO THIRD PARTIES WITHOUT THE WRITTEN PERMISSION OF THE OWNER. ALL RIGHTS RESERVED.		THIRD ANGLE PROJECTION TO BS 8888		TOLERANCES IN LINE WITH PENNY & GILES STANDARDS 56-301		NO		MH DA		RTP	
		CHANGES TO THIS BORDER MUST BE ACTIONED ON SK309927		UNLESS OTHERWISE STATED		18/05/10		JD		ENG' APPROVAL		QUAL' APPROVAL	
						ISSUE		DATE		DRAWN		CHANGES	

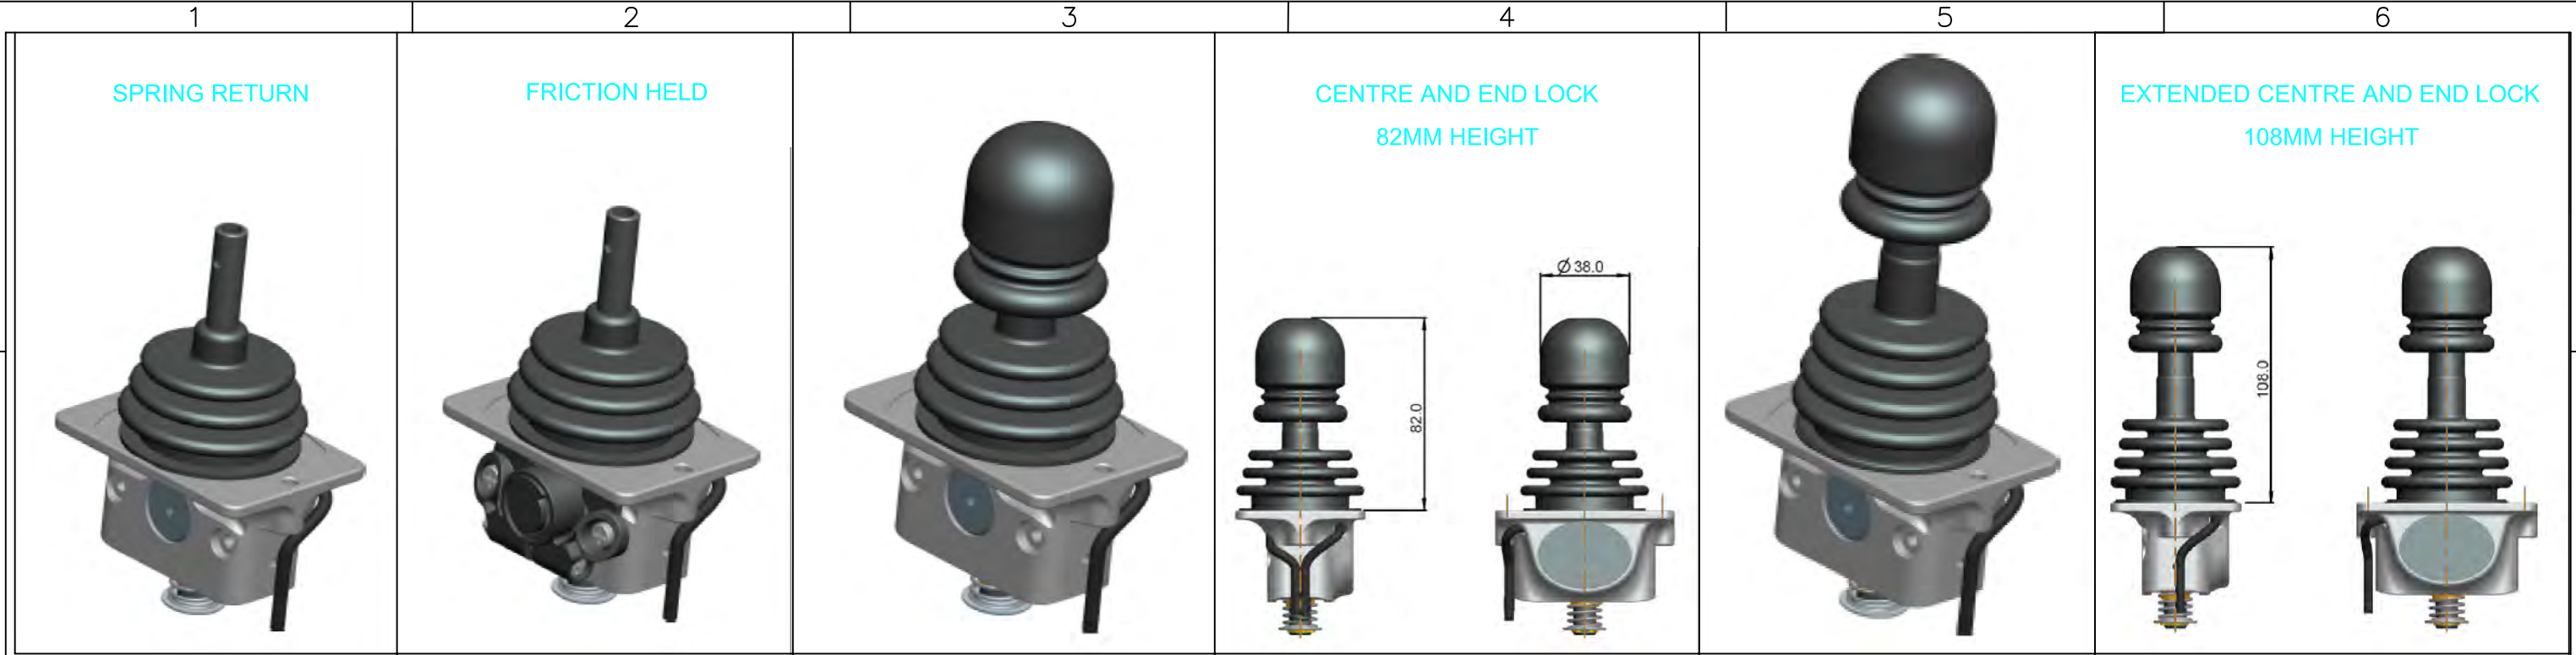

ENVIRONMENTAL DATA

CRITERIA	TESTING STANDARD
Sealing (above mounting panel)	BS-EN 60529 rating IP69K
Sealing (below mounting panel)	Not Sealed Mechanically Under Panel
Sealing (electronics)	BS-EN 60529 rating IP69K
Operating Temperature range	BS EN 60068-2-14 (-40°C to +85°C)
Storage Temperature range	BS EN 60068-2-14 (-50°C to +85°C)
Temperature \ Humidity	BS EN 60068-2-38
Vibration (Random)	BS EN 60068-2-6
Vibration (Sinusoidal)	BS EN 60068-2-64
Vibration (Shock)	BS EN 60068-2-29
Vibration (Bump)	BS EN 60068-2-27
Salt Spray	BS EN 60068-2-11
Drop Test	BS EN 60068-2-31
Radiated Susceptibility	BS EN 61000-4-3

WIRING DETAILS (dual output, single supply)

WIRE	COLOUR	FUNCTION
1	RED	5V Supply
2	BLACK	Ground
3	YELLOW	Joystick Output 1
4	WHITE	Joystick Output 2


Sensor wiring looms from Joystick will be 230mm in length

Handle wiring looms from Joystick will be 230mm in length

LABELLING DETAIL LABEL TO CONTAIN

P&G CONTROLS Ltd. U.K	
Specification Number	JC1500-GEN-****
	JC1500 JOYSTICK
Serial Number	*****
Reference	****MMYYYY
Reference Description	
Job Number	E.g 62854
Month	MM
Year	YYYY

STA INTERFACE OPTION
 JC1500 Adaptor plate P48692, This is needed when an AMF handle is fitted.
 Plate thickness 2.90/3.35mm.
 Finished in black eggshell epoxy (all surfaces).
 Note: Joystick assembly is mounted from the top of the panel when adapter plate is fitted

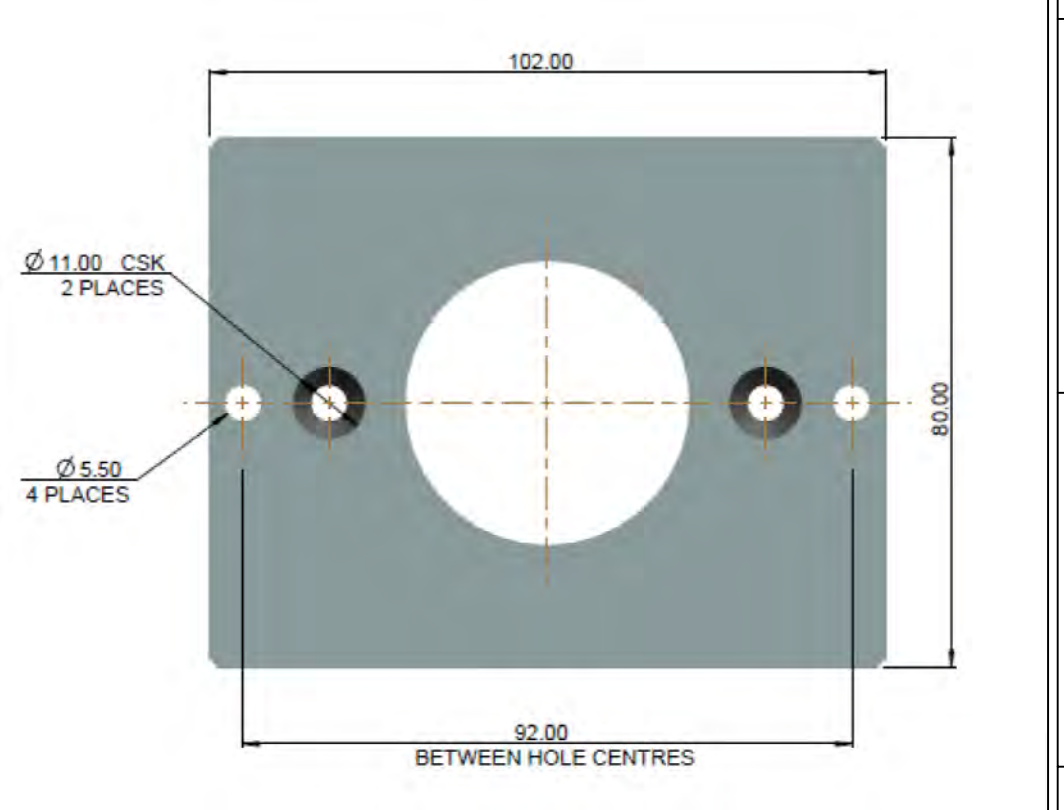

A3 ACAD	Penny + Giles © COPYRIGHT RESERVED.	METRIC NOT TO SCALE: DO NOT SCALE. IF IN DOUBT, ASK.	ALL SCREW THREADS TO BS 3643 PT. 2 EXTERNAL CLASS: 6g INTERNAL CLASS: 6H TOLERANCES IN LINE WITH PENNY & GILES STANDARDS 56-301	RoHS COMPLIANCE			TITLE			SPECIFICATION NUMBER		
				YES	 	NO	SINGLE AXIS JOYSTICK			JC1500-GEN-****		
SHT 3 OF 3 SHTS	THIS DOCUMENT CONTAINS CONFIDENTIAL AND/OR PROPRIETARY INFORMATION AND MAY NOT BE REPRODUCED IN ANY FORM WHATSOEVER, NOR MAY ITS CONTENTS BE DIVULGED TO THIRD PARTIES WITHOUT THE WRITTEN PERMISSION OF THE OWNER. ALL RIGHTS RESERVED.	THIRD ANGLE PROJECTION TO BS 8888 CHANGES TO THIS BORDER MUST BE ACTIONED ON SK309927	LINEAR (MACHINING) 0. mm +/- 0.5mm 0.0 mm +/- 0.2mm 0.00 mm +/- 0.1mm 0.000 mm +/- 0.01mm	ANGULAR +/-1° UNLESS OTHERWISE STATED	1	18/05/10	JD	MH	DA	RTP		
1	2	3	4	5	6	7	8	9	10	11	12	13